


## Pressure gauge valve with test flange

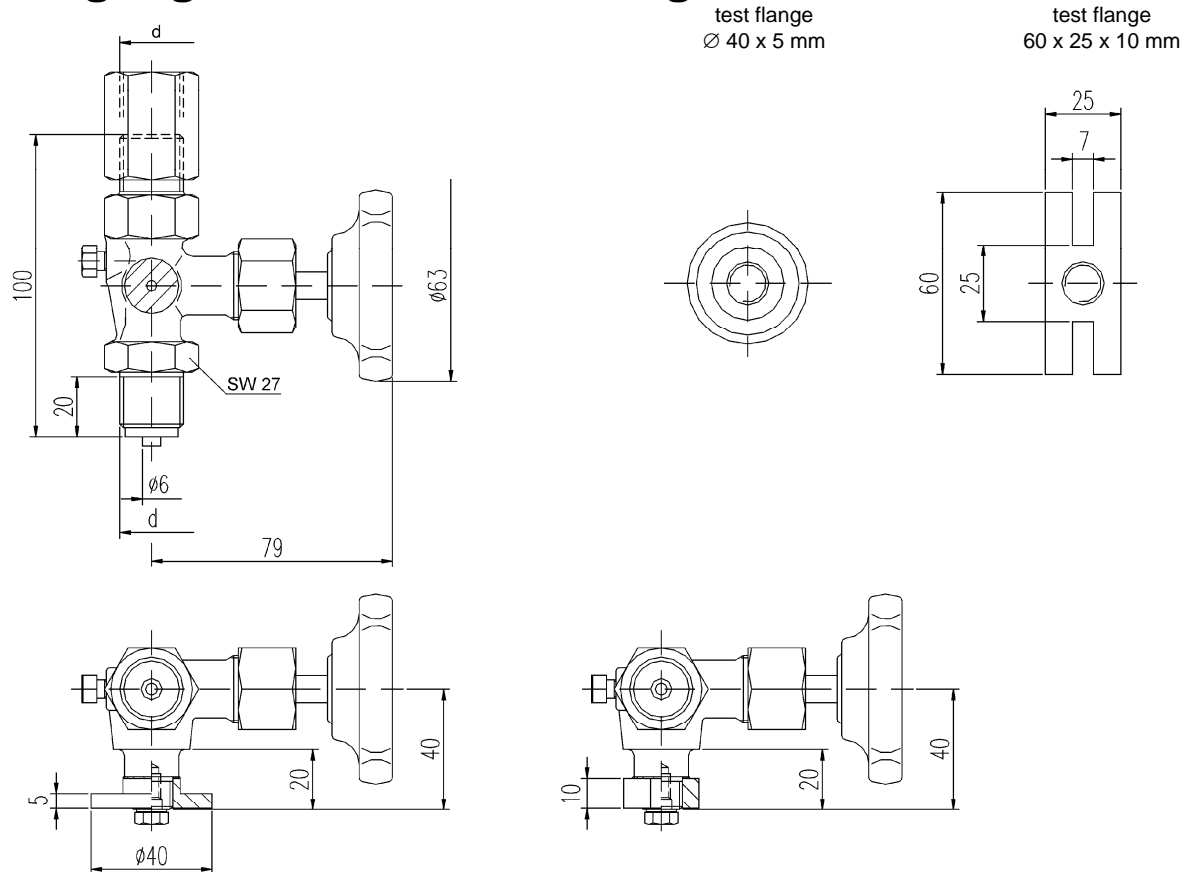

screw plug with gasket

MOUNTING ACCESSORIES see section 10

PN	Connection thread d	Material	Part no. with test flange	
			Ø 40 x 5 mm	60 x 25 x 10 mm
250 400 400	G 1/2	brass	15-V02-TFC-MS-51-250	15-V02-TFR-MS-51-250
		steel	15-V02-TFC-SC-51-400	15-V02-TFR-SC-51-400
		st. stl.	15-V02-TFC-SS-51-400	15-V02-TFR-SS-51-400
250 400 400	½ NPT	brass	04-V02-TFC-MS-50-250	04-V02-TFR-MS-50-250
		steel	04-V02-TFC-SC-50-400	04-V02-TFR-SC-50-400
		st. stl.	04-V02-TFC-SS-50-400	04-V02-TFR-SS-50-400

Components	Brass <sup>1)</sup>	Steel	Stainless steel <sup>1)</sup>
	DIN-Material Number		
Body <sup>2)</sup>	brass	1.0460	316Ti (1.4571)
Flange	brass	steel	316Ti (1.4571)
Valve stem	1.4104		316Ti (1.4571)
Needle tip	1.4104		316Ti (1.4571)
Packing	PTFE up to 200 °C		
Union nut	steel		stainless steel
Adjusting nut	steel		stainless steel
Sealing cap	steel		316Ti (1.4571)
Vent screw	316Ti (1.4571)		
Hand wheel	plastic		

- **Body:** brass: pressed part  
steel/stainless steel: die-pressed part
- **Surface:** steel phosphatized
- Internal stem thread
- Stem with cold rolled surface and non-rotating needle tip

<sup>1)</sup> Can also be supplied for oxygen service.  
Please notice order instruction B 3!

<sup>2)</sup> Available with inspection certificate 3.1.B according to EN 10 204